

# 745 - 945


## PCB Terminal blocks quick-connect - Trelec range (spacing of 5 / 5,08 / 7,5 / 7,62 / 10 / 10,16 mm)

www.mfom.fr


 Buy this product online

745 :

$$L = (P \times N) + 4,2 \quad N = \text{Nombre de plots} - 1$$

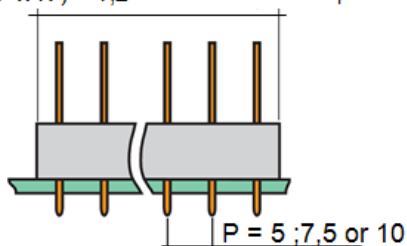


5 or 6,3 mm      2 x 2,8 mm





945 :

$$L = (P \times N) + 4,2 \quad N = \text{Nombre de plots} - 1$$

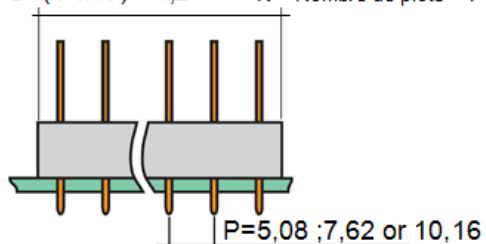

5 or 6,3 mm      2 x 2,8 mm

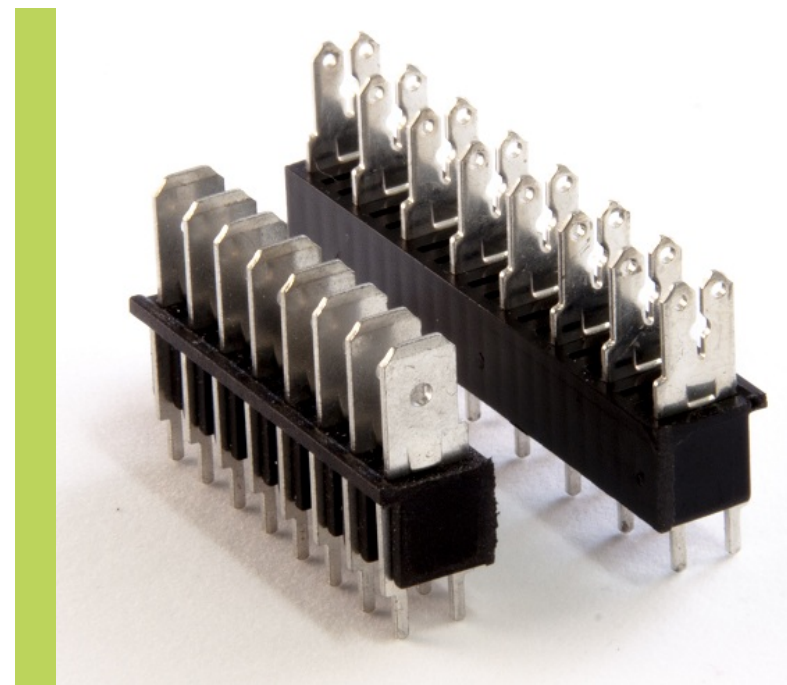

### Electrical characteristics

745 • • Rated Voltage : 380 Volts • Rated current : 25 A • Spacing: 5 / 7,5 / 10 mm • Contacts: 2 to 17 • • 945 • • Rated voltage : 250 to 380 Volts • Rated current : 5 to 25 A • Spacing: 5,08 / 7,62 / 10,16 mm • Contacts: 2 to 17

### Material

Terminal : Brass or steel • Housing : PA 6 UL 94 VO

### Other characteristics

Special mounting on request